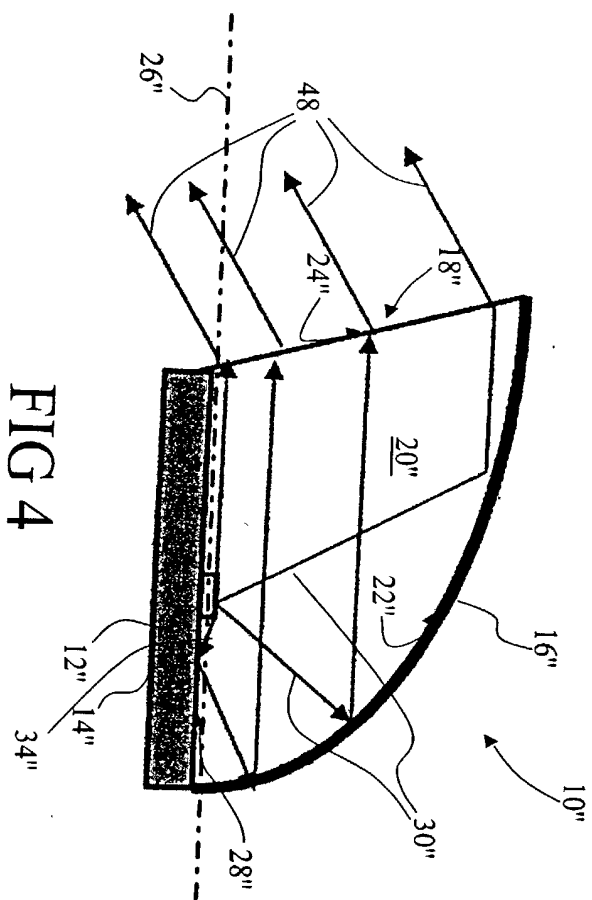
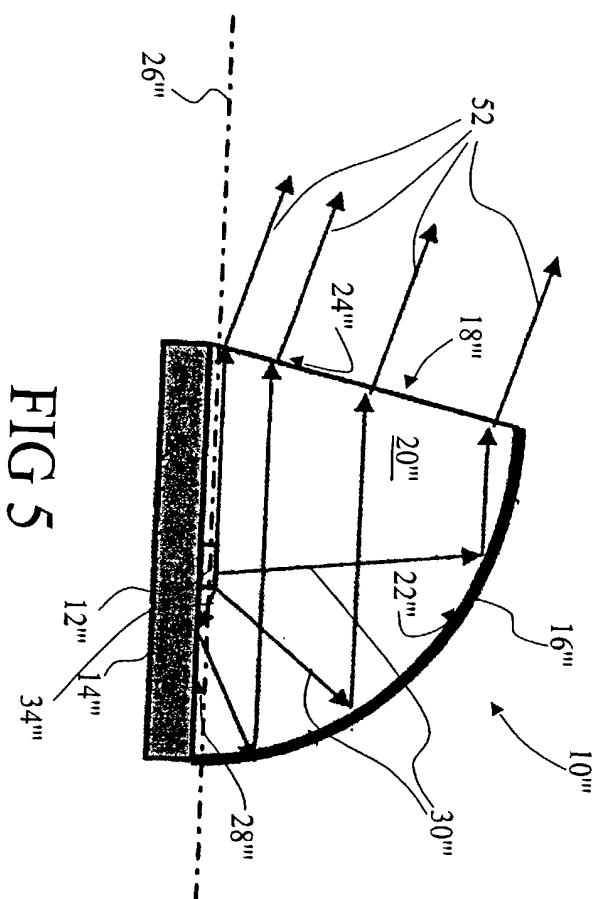
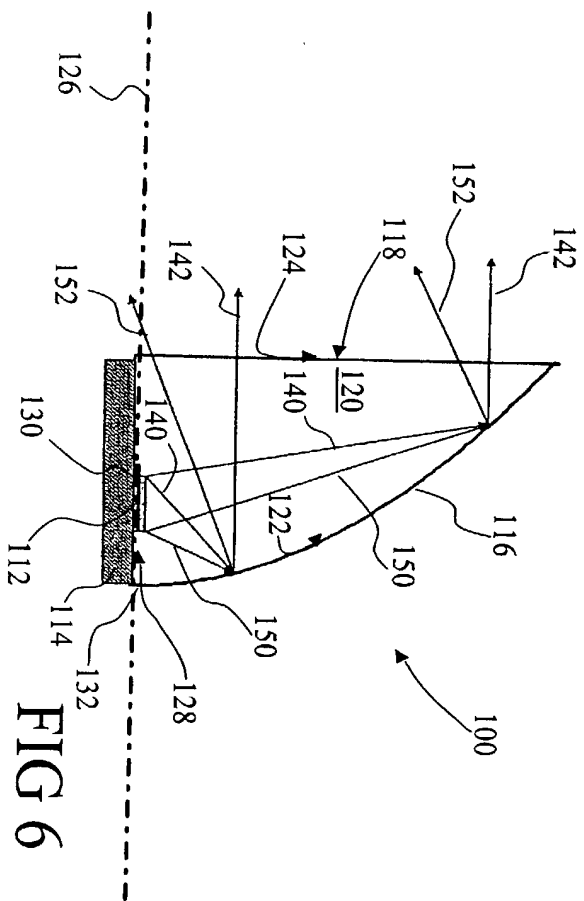
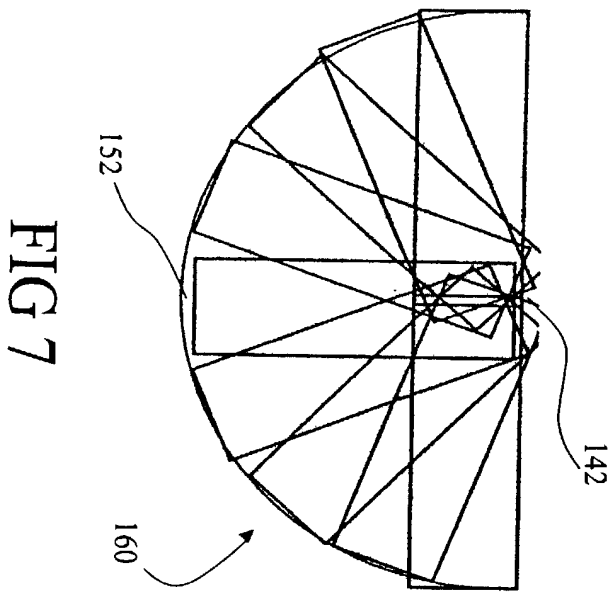


FIG 3













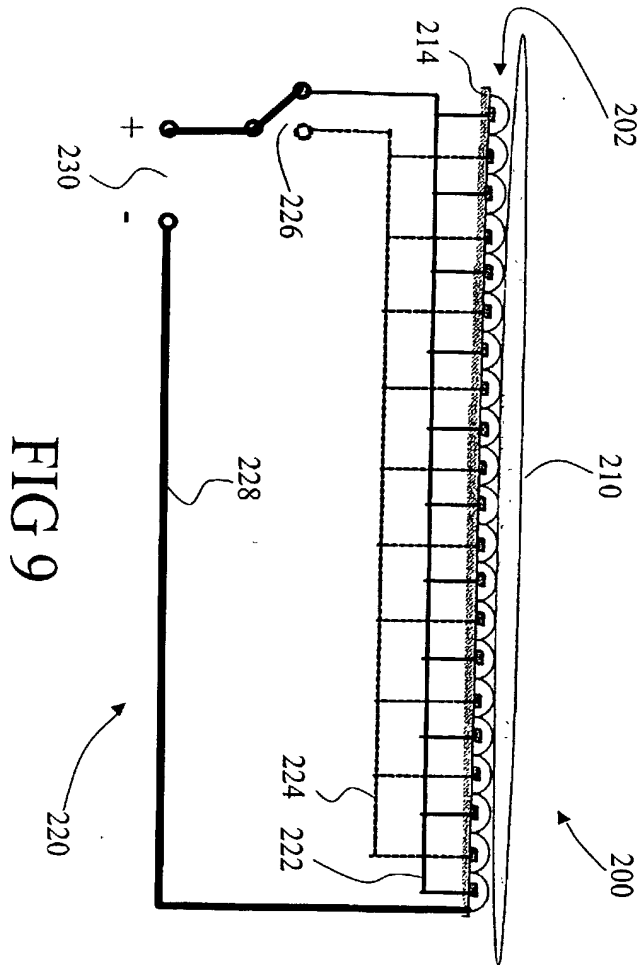


FIG 9

FIG. 10 is a perspective view of the device 300 in a second configuration. The device 300 includes a base 306 and a curved surface 302. The base 306 is a rectangular block with a textured surface. The curved surface 302 is a dome-like structure that is attached to the base 306. The curved surface 302 is divided into two regions, 310 and 312, by a vertical line 304. The region 310 is the lower part of the curved surface, and the region 312 is the upper part. The region 312 is shaded with a stippled pattern. Arrows indicate the direction of light rays or signal paths originating from the base 306 and passing through the curved surface 302.

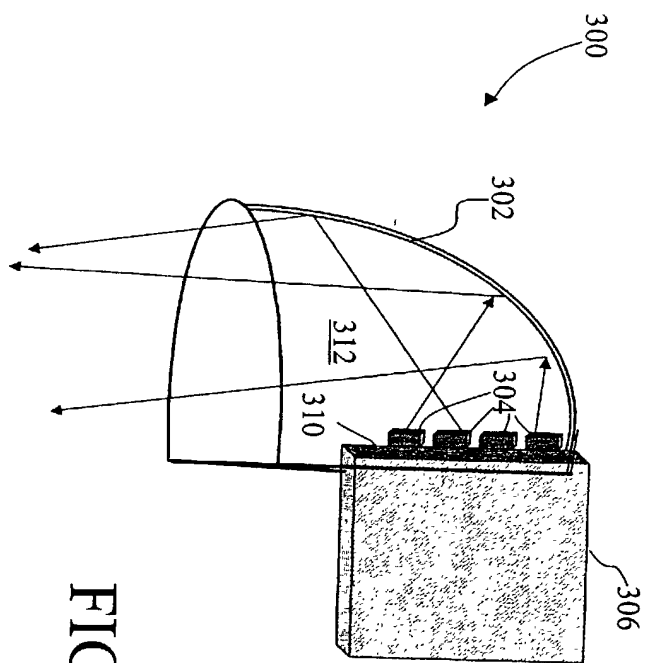


FIG 10

